



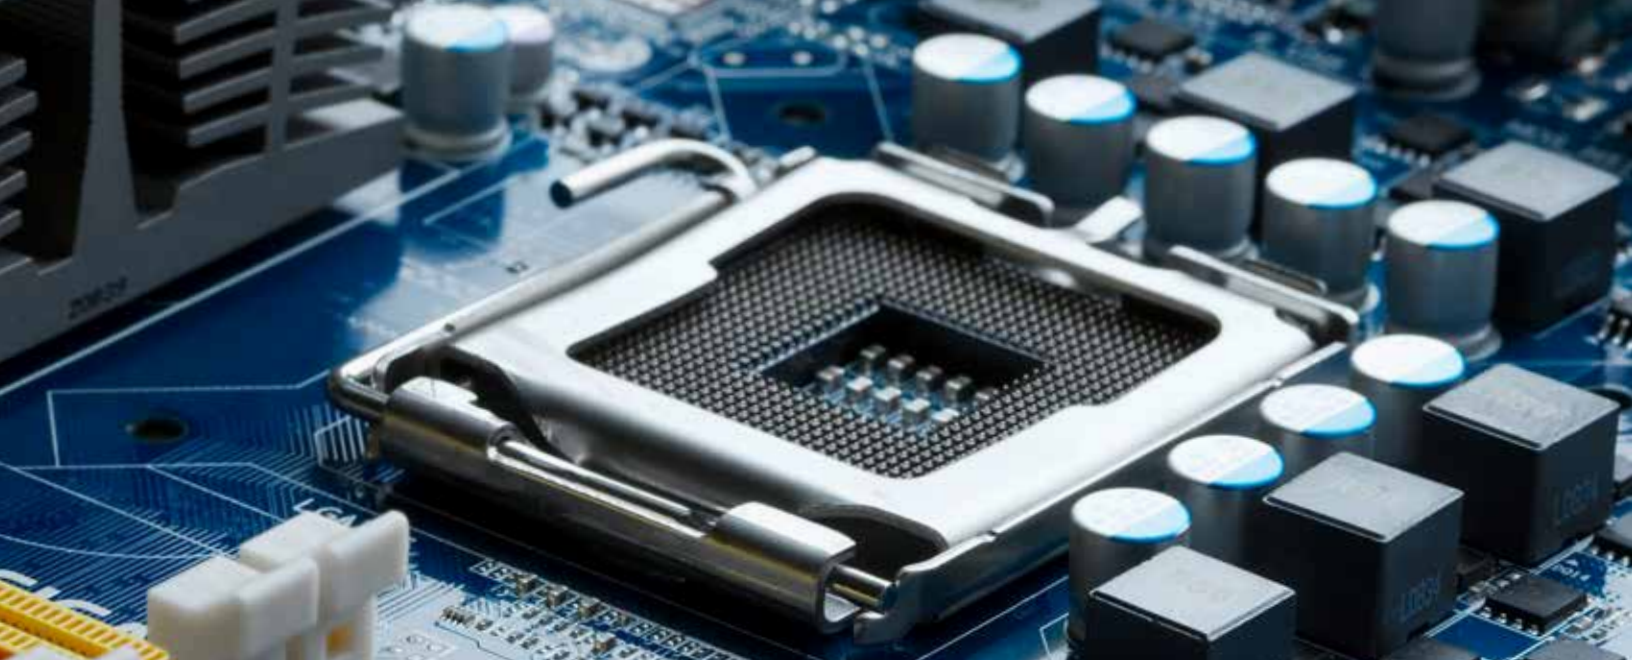

RECOMMENDED  
ELECTRONIC ASSEMBLY  
MATERIALS

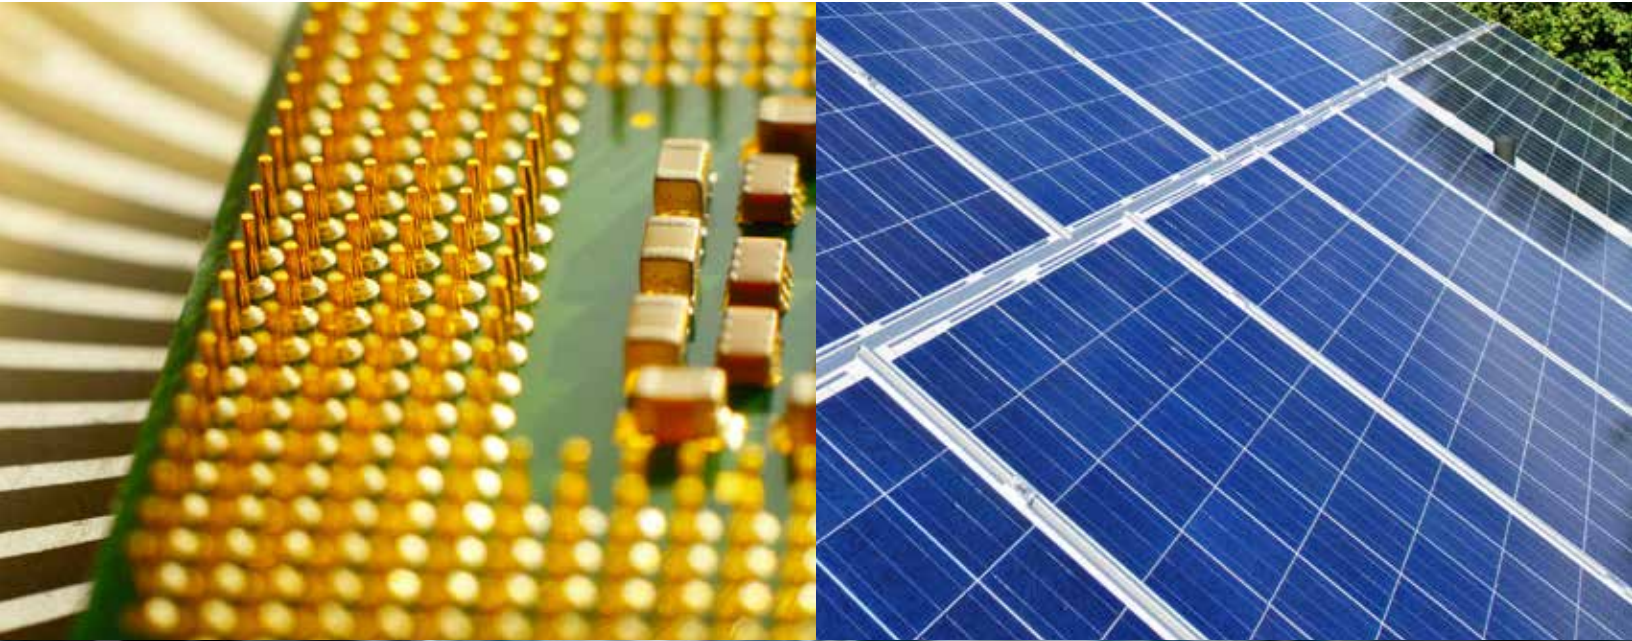

# MATERIALS AND PEOPLE THAT DRIVE INNOVATION

Kester, an Illinois Tool Works Company (ITW), is a leading global supplier of assembly materials to the electronic assembly, component and microelectronic marketplaces. Our products include an array of basic and high-tech attachment materials including traditional soldering chemicals, paste, wire and bar products. We serve a worldwide customer base with facilities in North America, Europe and Asia. ITW has become one of the world's leading diversified manufacturers of specialized industrial equipment, consumables and related service businesses. ITW businesses serve local customers and markets around the globe, with a significant presence in developed as well as emerging markets. The company has operations in 57 countries that employ more than 50,000 women and men who adhere to the highest ethical standards.

Kester products are solution-driven, reliable and backed by unparalleled customer service. We believe that long-term relationships drive innovation and that people are at the center of everything we do.

## Kester offers the following solutions:

- Solder Paste
- Liquid Solder Flux
- Solder Wire
- Tacky Solder Flux (TSF)
- Preforms
- SE-CURE™ Advanced Materials for Semiconductor Packaging
- Bar Solder
- A full spectrum of global customer technical support



# Kester's Products Offer High-Reliability



Soldering made easy with high-reliability products for demanding applications.

Recently, manufacturers in the Electronic Assembly industry have expressed concern over no-clean flux residue and its influence on reliability. This concern has been heightened by miniaturization simultaneous with high-density board design trends.

To ensure high reliability, Kester has followed specific experimental procedures based on simple chemical fundamentals. These protocols discriminate two primary chemical mechanisms causing reliability failures: corrosion and electrochemical migration. Including industry standards and customer-specific testing, Kester is proud to present our series of chemically reliable products.



## NP505-HR Solder Paste

A zero-halogen, lead-free, no-clean solder paste formula developed specifically for high-reliability applications. Recently passed the Bono Corrosion Test with a corrosion factor (Fc) value of 1.1%.



## 296 Flux-Cored Wire

A zero-halogen, lead-free, no-clean solder wire. With its unique flux chemistry system, 296 provides superior workability performance for both manual and automated soldering in the electronics industry. 296 is classified as Type ROL0 flux under J-STD-004B specifications.



## SELECT-10™

### Selective Soldering Flux

A zero-halogen, no-clean selective soldering flux designed to withstand long dwell times and high preheat temperatures.



## NF372-TB Soldering Flux

A zero-halogen, no-clean, low solids liquid flux designed to withstand long dwell times and high preheat temperatures needed in thick board assemblies. Recently passed the Bono Corrosion Test with a corrosion factor (Fc) value of 0.5%.



## NF372-TB Flux-Pen®

A zero-halogen, no-clean flux-pen for high-reliability applications.



## RF550

A high-reliability, zero-halogen, no-clean rework flux designed for electronic component rework and repair applications.

# NEW PRODUCT

## NP545 Solder Paste

**THE PASTE WITH A  
1 YEAR UNREFRIGERATED SHELF LIFE**



## **NP545 IS A ZERO-HALOGEN, LEAD-FREE, NO-CLEAN SOLDER PASTE FEATURING:**

- Consistent print performance to 0.5AR
- Wide reflow profile window with good solderability
- Excellent shelf life, 1 year in both refrigerated and room temperature conditions
- Low QFN/BGA voiding
- Compatible with multiple conformal coatings
- Excellent cosmetics and a clear residue

# SOLDER PASTE



Kester offers a complete line of solder paste to fit the needs of the electronic assembly market. The preferred products below cover the complete range of application types including no-clean, water-soluble, halogen-free and lead-free.


Please visit [www.kester.com](http://www.kester.com) or call customer service for the latest offerings.

Formula	Description	Type	Alloy/Mesh	Class	Packaging
<a href="#">WP601-ZH</a>	The Zero-Halogen Chemistry for Water-Soluble Applications	WS	SAC305, Type 4	ORM0	500g JAR 600g CRT
<a href="#">NP545</a>	The Lead-Free No-Clean Zero-Halogen Paste	NC	SAC305, Type 3 & 4 Sn63Pb37, Type 4	ROL0	500g JAR 600g CRT 750g DEK
<a href="#">NP505-HR</a>	The Lead-Free No-Clean Paste that Passes Harsh Modified SIR Testing	NC	SAC305, Type 3, 4 & 5	ROL0	500g JAR 600g CRT
<a href="#">NXG1</a>	The Lead-Free No-Clean Paste that Works as Well as SnPb Alloys	NC	SAC305, Type 3	ROL1	500g JAR 600g CRT
<a href="#">EP256HA</a>	The No-Clean Leaded Paste with Ultimate Activity for Difficult Soldering Applications	NC	Sn63Pb37, Type 3	ROL0	500g JAR 600g CRT
<a href="#">HM531</a>	The Water-Soluble Leaded Paste that Prints Everything	WS	Sn63Pb37, Type 3	ORM0	500g JAR 600g CRT
<a href="#">R276</a>	The Dispensable Paste for Every Application, Formulated in Both Leaded and Lead-Free Alloys	NC	Sn63Pb37 & SAC305, Type 3	ROL0	35g SYR 100g SYR
<a href="#">R500</a>	Dispensable Water-Soluble Solder Paste for Leaded Alloys	WS	Sn63Pb37 Type 3	ORM0	35g SYR
<a href="#">RF550</a>	The High-Reliability, Zero-Halogen, No-Clean Rework Flux	NC		ROL0	30g SYR

# NEW PRODUCT

## SF800-LR

**THE ZERO-HALOGEN, LOW RESIDUE AND  
LOW SOLID LIQUID FLUX FOR  
PHOTOVOLTAIC ASSEMBLY**

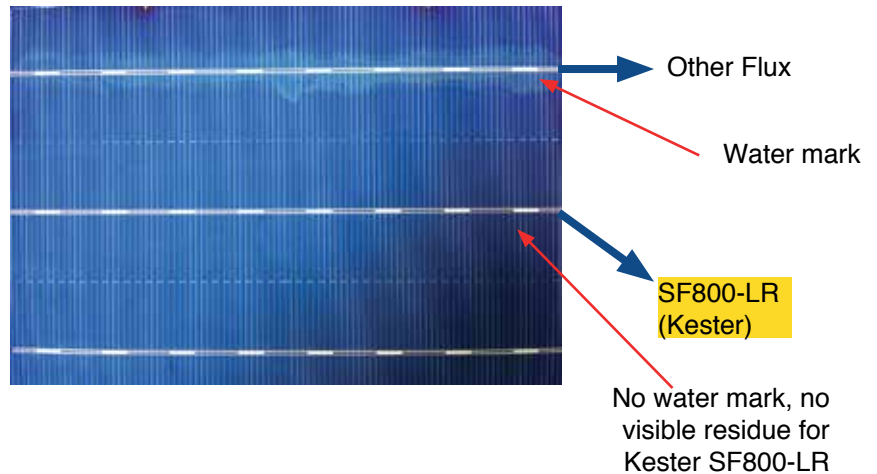

## **SF800-LR IS A ZERO-HALOGEN, LOW-RESIDUE, LOW-SOLIDS, ORGANIC-BASED LIQUID FLUX DESIGNED SPECIFICALLY FOR TABBING AND STRINGING APPLICATIONS, FEATURING:**

- Extremely low residue - minimal post cleaning after soldering thereby maintenance of equipment is reduced
- Low Solids (around 1.5%)
- Excellent Peel Force Resistivity
- Fast Wetting
- High Reliability Liquid Flux
- Suitable for dipping and spraying application methods

# LIQUID FLUX

Lead-free wave and selective soldering systems require exposing the flux to slightly higher soldering temperatures. Lead-free alloys traditionally wet metal surfaces more slowly than tin-lead. Kester liquid fluxes for lead-free assembly have new activator packages to enable rapid wetting and hole-filling, ensuring reliable product output. The table below shows preferred Kester liquid fluxes available globally.

Please visit [www.kester.com](http://www.kester.com) or call customer service for the latest offerings.



Formula	Description	Packaging		Type	Solvent	% Solids	Class
SF800-LR	The Zero-Halogen, Low Residue and Low Solid Liquid Flux for Photovoltaic Assembly	1 Gal	20 Liter	NC	Alcohol	1.5	N/A
SELECT-10™	The Liquid Flux Designed Specifically for The Needs of the Selective Soldering Process	1 Gal 5 Gal	1 Liter	NC	Alcohol	10	ROLO
SELECT-3.9™	The Liquid Flux Designed Specifically for The Needs of the Selective Soldering Process	1 Gal 5 Gal	1 Liter	NC	Alcohol	3.9	ROLO
NF372-TB	The No-Clean Flux for High Temperature and Thick Board Applications	1 Gal 5 Gal	53 Gal 20 Liter	NC	Alcohol	3.9	ROLO
985M	The No-Clean General Use Wave Solder Flux	1 Gal 5 Gal	53 Gal 20 Liter	NC	Alcohol	3.6	ROLO
952-S	The Solar Applications Flux	1 Gal 5 Gal	53 Gal 20 Liter	NC	Alcohol	2.0	ORLO
959T	The Low-Solids No-Clean Flux that Minimizes Micro-Solderballs	1 Gal 5 Gal	53 Gal 20 Liter	NC	Alcohol	2.9	ORLO
979VT	The Best Wetting Properties Available in a VOC-Free Liquid Flux	1 Gal 5 Gal	53 Gal 20 Liter	NC	Water	5.0	ORLO
2331-ZX	The Industry Proven Water Soluble Wave Solder Flux	1 Gal 5 Gal	53 Gal 20 Liter	WS	Alcohol	33	ORH1
2235	The High Activity, Low Foaming Water-Soluble Flux	1 Gal 5 Gal	53 Gal 20 Liter	WS	Alcohol	11	ORH1
186	The RMA Flux Designed for High Thermal Stability	1 Gal 5 Gal	53 Gal 20 Liter	RMA	Alcohol	36	ROLO
4662	The Thinner for NC Alcohol-Based Fluxes	1 Gal 5 Gal	53 Gal 20 Liter	Thinner	Alcohol		

# SOLDER WIRE

Kester wire products have been developed to provide superior performance for robotic soldering and hand soldering in the electronics industry. While the globally available preferred products are listed below, other combinations and core fluxes may be available.

Please visit [www.kester.com](http://www.kester.com) for the most updated listing of all available cored wire and solid wire products.



## LEAD-FREE WIRE OFFERINGS

Formula	Description	Type	Alloy	Class
296	The Zero-Halogen Flux	NC	SAC305	ROL0
275	The Superior Wetting No-Clean Core Flux	NC	K100LD SAC305	ROL0
245	The No-Clean Cored Flux Core Choice for Lead-Free Builds	NC	SAC305 K100LD	ROL0
331	The High Activity, Water-Soluble Core Flux for Soldering Difficult Metals	WS	K100LD SAC305	ORH1
48	The Activated Rosin Flux Developed for Lead-Free Applications	RA	K100LD SAC305	ROM1



## LEADED WIRE OFFERINGS

Formula	Description	Type	Alloy	Class
245	The No-Clean Flux Core Choice for Leaded Builds	NC	Sn63Pb37	ROL0
331	The High Activity, Water-Soluble Core Flux for Soldering Difficult Metals	WS	Sn63Pb37	ORH1
44	The Activated Rosin Flux Designed for Instant Wetting Action	RA	Sn63Pb37 Sn60Pb40	ROM1

# PREFERRED CONFIGURATIONS

Other diameter and core size options may be available. Please visit [www.kester.com](http://www.kester.com) or call customer service for the latest offerings.

Formula	Alloy	Diameter	Flux %
275	SAC305	0.015" (0.4mm)	2.2%
		0.020" (0.5mm)	2.2%
		0.025" (0.6mm)	2.2%
		0.031" (0.8mm)	2.2%
		0.050" (1.3mm)	2.2%
		0.062" (1.6mm)	2.2%
	K100LD	0.093" (2.4mm)	2.2%
			0.031" (0.8mm)
245	Sn63Pb37	0.015" (0.4mm)	1.1%
		0.020" (0.5mm)	1.1%
		0.020" (0.5mm)	2.2%
		0.025" (0.6mm)	1.1%
		0.031" (0.8mm)	1.1%
		0.031" (0.8mm)	2.2%
		0.031" (0.8mm)	3.3%
		0.050" (1.3mm)	1.1%
	SAC305	0.062" (1.6mm)	1.1%
			0.031" (0.8mm)
331	Sn63Pb37	0.020" (0.5mm)	3.3%
		0.025" (0.6mm)	3.3%
		0.031" (0.8mm)	3.3%
		0.062" (1.6mm)	3.3%
	SAC305	0.031" (0.8mm)	3.3%
	K100LD	0.031" (0.8mm)	3.3%
44	Sn60Pb40	0.031" (0.8mm)	3.3%
	Sn63Pb37	0.031" (0.8mm)	3.3%
		0.050" (1.3mm)	3.3%
		0.062" (1.6mm)	3.3%
48	SAC305	0.031" (0.8mm)	3.3%
		0.062" (1.6mm)	3.3%
	K100LD	0.031" (0.8mm)	3.3%
		0.062" (1.6mm)	3.3%
296	SAC305	0.010" (0.25mm)	2.2%
		0.015" (0.40mm)	2.2%
		0.020" (0.50mm)	2.2%
		0.010" (0.25mm)	2.8%
		0.031" (0.80mm)	2.2%








# PREFORMS



Kester preforms can be specified in a variety of forms and sizes. Common preforms and their dimensions are seen in the first table below. Depending on customer specifications on alloy type, flux core or coating and packaging requirements, the combination variables are nearly endless. The charts below are offered as a guide to help customers understand the possible options and configurations. Please call Kester Sales to start your preform quote.



## Solderforms

		Dimensions	Tolerance	
	RIBBONS	.050" - 2.5" (1.27 - 63.5mm)	± .005" (.127mm)	
		t	.005" - .060" (.127 - 1.52mm)	± .002" (.050mm)
	CUT-OFFS	W	.028" - .250" (.0011-6.3mm) > .250" (6.35mm)	± .003" (.076mm) ± .005" (.127mm)
		L	< .500" (12.7mm) > .500" (12.7mm)	± .003" (.076mm) ± .005" (.127mm)
		t	.004" - .125" (.102 - 3.1mm)	± .002" (.050mm)
	WASHERS	OD	.030" - 1.0" (.762 - 25.4mm)	± .002" (.050mm)
		ID	.015" - 0.93" (.381-23.6mm)	± .002" (.050mm)
		t	.004" - 0.95" (.102 - 24.1mm)	± .002" (.050mm)
	DISCS	d	.020" - .250" (.508 - 6.35mm)	± .002" (.0500mm)
		t	.004" - .012" (.102 - .305mm)	± .002" (.050mm)
	PELLETS	d	.010" - .585" (.254 - 14.8mm)	± .003" (.076mm)
		L	< 2" (50.8mm)	± .003" (.076mm)
			2 - 6" (50.8 - 152.4mm) 6 - 10" (152 - 2520mm)	± .010" (.254mm) ± .020" (.508mm)

## Alloy

Preferred Lead-Free Alloys
Sn96.5Ag3.0Cu0.5
Sn95.5Ag3.8Cu0.7
Sn97Ag0.2Sn0.8Cu2
Sn96.3Ag3.7

Preferred Leaded Alloys
Sn63Pb37
Sn10Pb88Ag2
Sn62Pb36Ag2
Sn60Pb40

Other alloys maybe available depending on melt point required.

## Fluxing Type

% Varies by Configuration

CORED - INTERNAL	COATED - EXTERNAL
245S	285
285	290S
48SF	44
44	291S
88	435

## Flux Descriptions

245S	No-Clean Flux ROL0
285	RMA Flux ROL0
290S	Low Solids Flux ROL0
48SF	RA Flux ROL1
44	RA Flux ROM1
88	RA Flux ROM1
291S	No-Clean Flux ORL0
435	High Activity WS Flux ORH1

## Key

W = Width	t = Thickness
L = Length	OD = Outer Diameter
d = Diameter	ID = Inner Diameter


## Packaging Types

Bulk in Jar    Stackpack    Tape & Reel    Layer Pack

# TACKY SOLDER FLUX

Kester Tacky Solder Fluxes (TSFs) are the industrial standard for Flip Chip and BGA Sphere Attach. With viscosities optimized for high speed application and holding of a chip or sphere in place prior to reflow, Kester TSFs enable wide process windows for our users. Known for their active soldering, Kester TSFs ensure good electrical connections on known good die and components.

Please visit [www.kester.com](http://www.kester.com) or call customer service for the latest offerings.

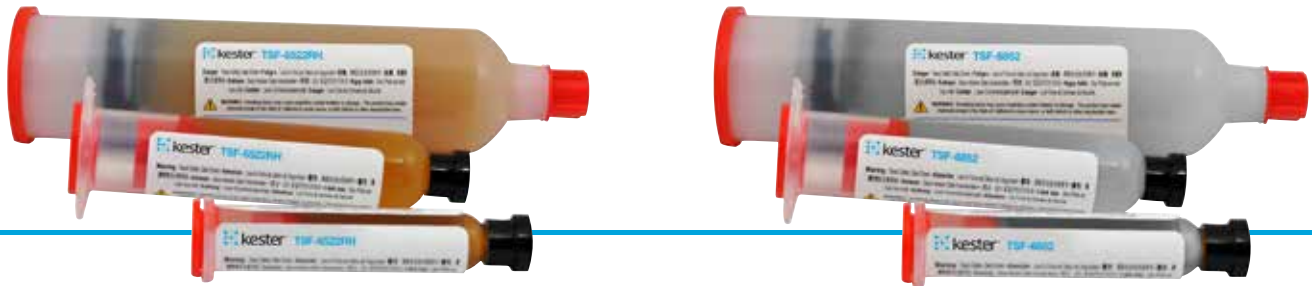


Formula	Description	Type	Class	Packaging*
<b>TSF-8818HF</b>	TSF-8818HF is a synthetic rosin-free water-soluble tacky solder flux. TSF-8818HF is a zero-halogen formula that uses TSF-6852 best-in-class cleanable chemistry. TSF-8818HF works well in dipping, printing and dispensing applications.	WS	ORH1	30g SYR 150g CRT
<b>TSF-6750</b>	TSF-6750 is a zero-halogen rosin-based tacky solder flux with the solderability of a fully halogenated flux. TSF-6750 works well in dipping, printing and dispense applications.	NC	ROL0	30g SYR 150g CRT
<b>TSF-6852</b>	TSF-6852 is a synthetic rosin-free water-soluble tacky solder flux. TSF-6852 has easy to clean liquid residues and solders quickly, allowing for short profiles.	WS	ORH1	15g SYR 30g SYR 100g JAR 165g CRT
<b>TSF-6522RH</b>	TSF-6522RH is a rosin-based, no-clean tacky soldering flux formula designed to be compliant with IEC 61249-2-21 definition for halogen-free materials.	NC	ROL0	10g SYR 30g SYR 100g JAR
<b>TSF-6522</b>	TSF-6522 is a rosin-based tacky solder flux that provides a wide process window for printing or dipping applications.	NC	ROL0	30g SYR 100g JAR 150g CRT

\*Other packaging may be available upon request.

## OSCA-R™ One Step Chip Attach

Kester's new OSCA-R product line combines Flux and Underfill Technology for Flip Chip and Cu-Pillar Die Attach processes, enabling:

- Process Simplification, by eliminating a separate cleaning and underfill dispensing process steps.
- Increased Profitability, by improving throughput with this faster process.
- Cost Reduction, based material consumption and less process equipment.

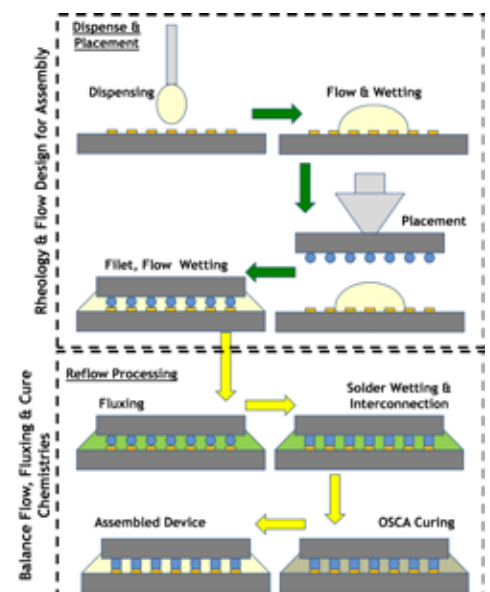

# KESTER HEADQUARTERS

## GLOBAL

800 West Thorndale Avenue  
Itasca, IL USA 60143  
Phone: (+1) 800.2.KESTER  
Fax: (+1) 630.616.4044  
customerservice@kester.com

## ASIA-PACIFIC

61 Ubi Avenue 1  
#06-01 UB Point  
Singapore 408941  
Kester.asia.cs@kester.com  
Phone: (+65) 6.449.1133  
Fax: (+65) 6.242.9036

## EUROPE

Ganghofer Strasse 45  
82216 Gernlinden  
Germany  
Phone: +49 (0) 8142 4785 0  
Fax: +49 (0) 8142 4785 61  
eu-customerservice@kester.com

## JAPAN

20-11 Yokokawa 2-Chome  
Sumida-Ku Tokyo, 130 Japan  
Phone: (+81) 3.3624.5351  
Fax: (+81) 3.3626.6253  
jpsales@kester.com  
jp-tech-service@kester.com

## TAIWAN

14F-5, No. 155, Zhong-Yang Road,  
Xin-Dian District, New Taipei City  
231, Taiwan, R.O.C.  
Phone: +886 2 8913 7516  
Fax: +886 2 8913 7539  
gcsales@kester.com

## CHINA

ITW SPECIALTY MATERIALS  
SUZHOU CO., LTD  
Hengqiao Road, Wujiang Economic  
Development Zone  
Suzhou, Jiangsu Province, China  
215200  
Phone: 86-512-8206 0807  
Fax: 86-512-8206 0010  
sgu@kester.com

## MALAYSIA

No.31 (first floor) Persiaran Mahsuri  
1/1  
Sunway Tunas 11900 Bayan Lepas  
Penang, Malaysia  
Phone: (+60) 4.641.4633  
Fax: (60) 4.641.4634  
kesterpn@kester.com

## LOCATION OF DISTRIBUTORS

Australia

Austria

Benelux

Bulgaria

Canada

China

Croatia

Czech Republic

Dominican Republic

Egypt

Finland

France

Germany

Hungary

India

Indonesia

Ireland

Israel

Italy

Japan

Lithuania

Luxembourg

Malaysia

Malta

Mexico

Netherlands

New Zealand

Philippines

Poland

Portugal

Puerto Rico

Romania

Russia

Singapore

Slovakia

South Africa

South Korea

Spain

Sweden

Switzerland

Taiwan

Thailand

Turkey

Ukraine

United Arab Emirates

United Kingdom

United States

Vietnam



Visit us at [Kester.com](http://Kester.com)